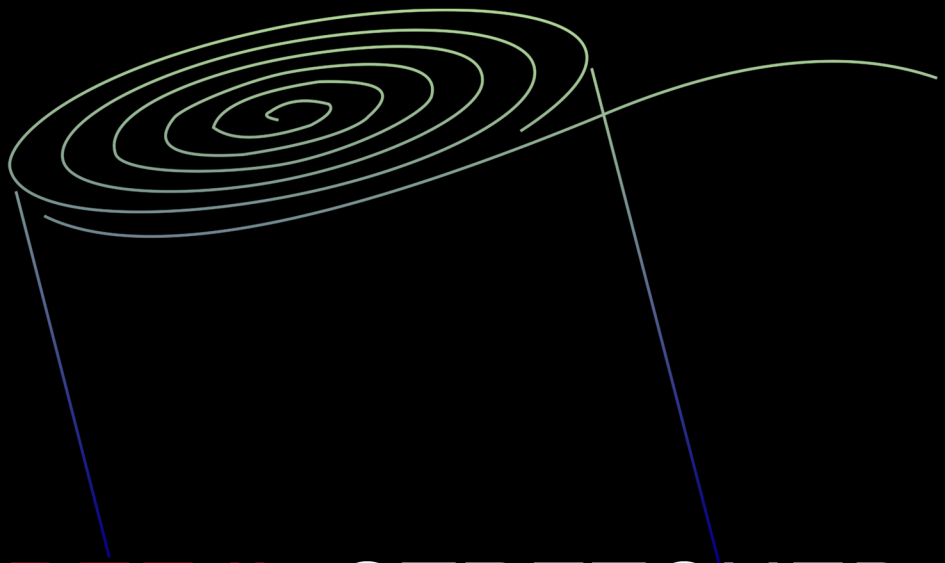


SHREEJI STRETCHED

Prestretched for Extra Strength, Better Yield and Lighter Weight

SHREEJISTRETCHED is the latest innovation from Sigma Stretch Films engineered to outperform all competitive prestretched hand films—regardless of thickness. SHREEJISTRETCHED's reinforced edges provide unrivaled load-holding force, tearresistance—and its superior puncture resistance holds corners better on C loads. SHREEJISTRETCHED's lightweight rolls and minimal neck down work together to reduce operator fatigue, allow maximum coverage and produce a better yield. With unrivaled clarity, SHREEJISTRETCHED's aggressive cling is designed to perform even in demanding sub zero cold storage applications!

SIHREEJISTRETCHED—the new, prestretched hand film solution

SHREEJI CLASSIC BLOWN
Applications Include:
Cold Environments
Grocery Warehouses
Distribution Warehouses
Internal Wrapping
Boxed Products
Food Processors
All Load Profiles

Shreeji Stretch Film Ind

SHREEJI STRETCHED

Film Width	Roll Length	Thickness	Roll/Pallet	Product Number
15.5″	2000″	Medium	132/Bulk	HPS1620MB

Shreeji Stretch Film Industies produces the most reliable and consistent stretch films available in North America. Our four regional plants in the UnitedStates along with our facility in Canada represent the most modern and sophisticated fleet of extrusion equipment in the stretch film industry. Each plant has been designed from the ground-up specifically to produce premium stretch film products. Shreeji Stretch Film offers the most complete range of both blown and cast,machine and hand films to fit your every need. Shreeji Stretch Film — the simple solution for all your stretch film needs

How to Apply ecoSUPREME Film

1. Tuck the end of the film between the boxes or tie to the skid. With the hand closest to the skidon top of the roll and the other hand on the bottom, walk forward with the film unwinding next to the load. Always hold the roll straight up and down—perpendicular to the floor and parallel to the load.\

2. Let the roll unwind easily as you move alongside the load until you are about 6 inches from the corner.

3. Stop. While holding the roll firmly,stretch the film beyond the corner to the maximum tension—then wrap the film around the corner. Repeat this process on all sides while overlapping each layer 1” to 3” in a spiral motion. Once the load is completely and securely wrapped, break off the film 12” past the corner and wipe it down.

Film Selector Worksheet

Current Film Used:

Load Information:

Product: _____ Brand: _____

Load Profile: _____ Type: _____

Height: _____ Gauge: _____

Width: _____

Length: _____

Weight: _____

Your Sigma sales representative will be pleased to discuss your requirements.

A Shreeji Stretch Film & Sun Valley
Worldwide Recycling Alliance
1-877-NXT-LIFE
www.nextlife-recycle.com

Shreeji Stretch Film Industries

“The Low Cost Solution”

93, G.I.D.C. Estate, Vitthal Udyognagar - 388121, Dist: Anand (Gujarat)

Email : ssfi94@hotmail.com **Web**: shreejistretchfilm.com

Sigma Stretch Film is a division of the Sigma Plastics Group of Companies
and is a Certified Minority Owned Company